



SMART-boks III SRT 8956



High-end receiver for RiksTV broadcasts

STRONG's SRT 8956 is a high-end receiver for terrestrial TV and radio broadcasts encrypted by RiksTV. It supports 4K content and gives access to the RiksTV entertainment portal, including movie rental, TV archive, and video on demand content. The receiver has a modern and stylish design and offers a variety of features: integrated dual-band Wi-Fi, a user-friendly Bluetooth remote control, and easy access to all available content, both from terrestrial broadcasts and the Internet.

User benefits

- Bluetooth remote control for operation of the receiver even through cabinet doors
- Supports 4K and HD content
- Quick and easy installation

- Menus in Norwegian and English
- 7 days Electronic Programme Guide
- Parental Control































SMART-boks III SRT 8956


Entertainment services via Internet connection*

- See last week's TV shows from selected channels
- Access to RiksTV entertainment portal, including movie rental, TV archive, and video on demand
- *Entertainment services will be made available continuously. See http://www.rikstv.no/ underholdningsportalen for available services.

Connectivity and power

- 12 V supply for use in boats, caravans etc.
- Video output: HDMI
- Audio output: Optical S/PDIF
- Analogue A/V
- 5 V support for active antenna
- Ethernet port (Internet connection)
- Integrated dual-band Wi-Fi

*Entertainment services will be made available continuously. See http://www.rikstv.no/ underholdningsportalen for available services.

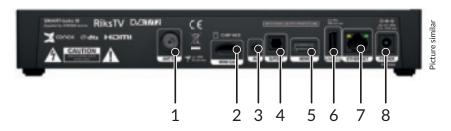

- 1. Antenna input
- 2. Mini smart card reader
- 3. Analogue Audio/Video output
- 4. Digital Audio Amplifier output
- 5. Connection to TV (HDMI)
- 6. USB storage device
- 7. Internet port
- 8. Mains input

DVB-T Terrestrial Front end

Modulation: DVB-T(QPSK, 16-QAM, 64-OAM)

Frequency range: 177.5 MHz ~ 794 MHz Channel bandwidth: 7/8 MHz switchable

Video Decoder

Decoder: ISO13818-2 - MP@ML, MP@HL ISO14496-2/ISO14496-10 MPEG-4 AVC MP@L3, HP@ L4.2

H.265/HEVC Main Profile and Main10

Video resolution: 4Kx2K (UHD); 1080p (HD); 1080i (HD); 720p (HD) Aspect ratio: 4:3, 16:9

Audio Decoder

Audio support: ISO 11172-3 / ISO 13818-3 (MPEG) ISO14496-3 MPEG-4- LC/HE Decompression: MPEG layers 1, 2 (Mono, Dual Channel, Joint Stereo, Stereo)

System and Memory

Processor: BCM7251S Flash memory: 256 MHz NAND Flash+4 MB NOR Flash System memory: 2 GB DDR4

Antenna Input: IEC-type, female HDMI USB 3.0, Type A connector Ethernet: standard RJ45 socket A/V (CVBS+AUDIO L/R) S/PDIF optical CA: mini smart card interface Mains input connector: 12 V/1.5 A DC adapter

Wi-Fi: IEEE 802.11b/g/n, 2.4 GHz IEEE 802.11a/n/ac, 5 GHz Bluetooth: 4.0 Input voltage: 100 ~ 240 V AC, 12 V DC, Power consumption: max. 18 W Power consumption in standby: 0.5 W Operating temperature: 0° ~ +45° C Storage temperature: -25° ~ +65° C Humidity: 95% Dimensions (W x D x H): 270 x 150 x 44.5 mm Weight: 557 g

EAN SRT 8956: 9120072371028

STRONG declares that this item complies with the basic requirements and other relevant regulations of directives 2014/35EU, 2014/30/EU, 2015/35/EU and RoHS 2015/35/EU. Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. RikIsTV is a registered trademark of Norges Televisjon AS (TNTV). The terms HDMI and appearance of products may change. RikIsTV is a registered trademarks of registered trademarks of HDMI Licensing of HDMI Licensing of HDMI Licensing of HDMI Licensing and Institute of HDMI Licensing of