

STRONG

Digital HD Satellite Receiver

SRT 7006



Modern appearance and enhanced reception technology

The brand new Free-To-Air HD satellite receiver SRT 7006 offers modern design and compelling features for every viewer's needs. The convenient USB port enables playback of files. 8 programmable timers remind you of your favourite programmes. Further features like the Electronic Programme Guide, parental control and channel editor complement the package. Explore advanced reception technology by STRONG. Upgrade your receiver functionality by adding the recording and Timeshift function (available at our webshop).

- HDTV receiver for digital Free-To-Air TV and radio programmes via satellite¹
- Supports Dolby® Digital Plus²
- USB port for playback of files and software updates³
- Upgrade your receiver functionality by adding the recording and Timeshift function (available at our webshop)
- Supports SatCR for connecting up to 8 receivers to 1 SatCR LNB
- 4000 channels/64 satellites memory capacity
- Exceptional picture quality and excellent sound
- Electronic Programme Guide (EPG) for on-screen information of present/next events for up to 7 days⁴
- Booking of events directly from EPG



USB
playback



4000
channels



Digital
audio



Favourite
lists



Energy
saving

DVB S2

HDMI

Dolby Audio



GotoX




SatCR
supported

Digital HD Satellite Receiver SRT 7006

- HDTV receiver for digital Free-To-Air TV and radio programmes via satellite¹
- Supports Dolby® Digital Plus²
- USB port for playback of multimedia files and software updates³
- Upgrade your receiver functionality by adding the recording and Timeshift function (available at our webshop)
- Supports SatCR for connecting up to 8 receivers to 1 SatCR LNB
- 4000 channels/64 satellites memory capacity
- Exceptional picture quality and excellent sound
- Electronic Programme Guide (EPG) for on-screen information of present/next events for up to 7 days⁴
- Booking of events directly from EPG
- Up to 8 programmable timers
- Power saving: switches to standby after a definable time
- Fast and easy channel database up/download to/from USB device
- Teletext and full multi-lingual DVB subtitles supported⁴
- Multiple audio track support⁴
- 8 favourite lists for TV and radio channels
- Parental control for locking selected channels with a password
- Multi-lingual On Screen Display (OSD)
- Easy to use channel handling options for finding, editing, moving, favouring and locking of channels
- Power on with the last viewed channel
- Video output via: HDMI, SCART (RGB, CVBS)
- Digital audio output via S/PDIF coaxial for connection to a digital amplifier
- Automatic, network and manual channel scan options
- Supports MPEG-4 and H.264
- Supports DiSEqC 1.0, 1.1, 1.2, GOTO X, SatCR
- **Connections:** SAT IN, USB, HDMI, TV SCART, S/PDIF coaxial, Audio L/R, DC power
- **Accessories:** Remote control, 2x AAA batteries, power adapter

¹ Subject to your local signal conditions
² Dolby Digital Plus, Dolby and the double-D symbol are registered trademarks of Dolby Laboratories
³ STRONG cannot guarantee the playback of video files although extensions are listed, as it depends on codec used, data bit rate and resolution (all MPEG codec formats are supported).
⁴ Availability depending on broadcaster

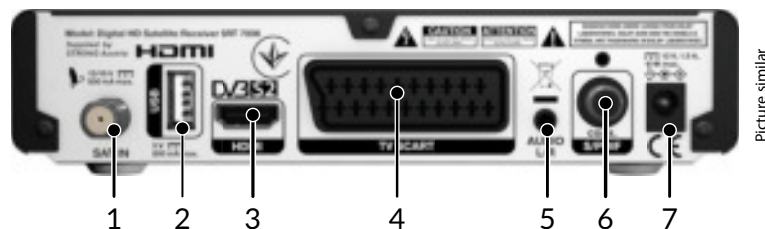

1. Satellite antenna
2. USB
3. TV (HDMI)
4. TV (SCART)
5. Audio Hi-Fi amplifier
6. Digital audio amplifier
7. Power adapter

Demodulator
 Demodulation: QPSK, 8PSK
 Input symbol rate: DVB-S QPSK: 1 ~ 45 Ms/s
 DVB-S2 8PSK/QPSK: 10~30 Ms/s
 FEC decoder: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 in DVB-S mode
 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 in DVB-S2 mode
 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 in 8PSK mode

Video Decoder
 Input rate: Max. 20 Mbit/s
 Aspect ratio: 16:9 widescreen, Pillarbox, 4:3 Pan&Scan, Letterbox
 Video resolution: PAL 50Hz: 576i, 576p, 720p, 1080i, 1080p

NTSC 60Hz: 480i, 480p, 720p, 1080i, 1080p

Audio Decoder
 Audio decoding: MPEG-1 Layer 1 & 2, AC3, Dolby Digital Downmix
 Audio mode: Mono L/R, Stereo
 Audio support: E-AC3, Dolby Digital, Dolby Digital Plus^{*}
 Sampling rate: 32, 44.1, 48 kHz

Tuner
 Type: Type1 F Type, IEC169-24, Female
 Input frequency range: 950 ~ 2150 MHz
 RF impedance: 75 Ohm unbalanced
 Signal level: -65 to -25 dBm
 LNB power: 13/18 V DC (+/- 5%), max. 0.5 A, overload protected

Switch versions: DiSEqC 1.0, 1.1
 LNB options: Universal, SatCR (max. 8 users)
 Motor drive options: DiSEqC 1.2, GotoX (DiSEqC 1.3)

System & memory
 Main processor: MSTAR MSD7S01
 Flash memory: 4 MB
 System memory: 64 MB

Connectors
 SAT IN
 USB 2.0 port: 5 V/800 mA (max.) supported
 HDMI
 TV SCART (RGB, CVBS, Audio L/R)
 3.5 mm Audio L/R

S/PDIF (coax.)
 Power adapter (12 V, 1.5 A)

General Data
 Power supply: AC 100 ~ 240 V ~ 50/60 Hz
 Input voltage: DC 12 V, 1.5 A
 Power consumption: max. 18 W, typ. 5 W
 Power consumption in standby: max. 0.5 W
 Operating temperature: 0 ~ +40°C
 Storage temperature: -10 ~ +50°C
 Operating humidity range: 10 ~ 85% RH, non-condensing
 Size (W x D x H) in mm: 170 x 122 x 40
 Weight in kg: 0.30

* Dolby Digital Plus and the double-D symbol are registered trademarks of Dolby Laboratories

EAN SRT 7006: 8717185449372

SERVICE CENTER			
AT	support_at@strong.tv 0820 400 150 (€ 0,12/Min, excl. Feestnetz)	DE	support_de@strong.tv 0180 501 49 91 (€ 0,14/Min, deutsches Festnetz) (€ 0,02/Min, mobile Mobilfunknetze)
BG	support_bg@strong.tv +359 32 634451	NL	support_nl@strong.tv
CEE	support_hu@strong.tv +36 1 445 26 10	FR	support_fr@strong.tv
	PL	UA	support_ua@strong.tv +380 (44) 238 61 50

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Manufactured under license from Dolby Laboratories. Dolby Audio, Dolby Digital, Dolby Digital Plus and the double-D symbol are trademarks of Dolby Laboratories. All product names are trademarks or registered trademarks of their respective owners.
 © STRONG 2020. All rights reserved.