

STRONG

Digital HD Satellite Receiver

SRT 7009



An unforgettable TV experience !

Receive your Free-To-Air programs thanks to the HD satellite receiver SRT7009. This device has many user-friendly features such as file playback via USB, 8 favorites lists, EPG, teletext. It is easy to install and also has an Ethernet port that provides access to RSS feeds and weather forecasts. Improve the functionality of your decoder by adding recording and Timeshift function (available at our webshop).

- HDTV receiver for digital Free-To-Air TV and radio programmes via satellite¹
- RSS feeds and weather forecasts via Ethernet
- Supports Dolby® Digital Plus²
- USB port for playback of files³ and software updates
- Supports SatCR for connecting up to 8 receivers to 1 SatCR LNB
- Display showing channel number in operating mode and time in standby
- Upgrade your receiver functionality by adding the recording and Timeshift function (available at our webshop)
- 4000 channels/64 satellites memory capacity
- Exceptional picture quality and excellent sound
- Electronic Programme Guide (EPG) for on-screen information of present/next events for up to 7 days⁴
- Booking of events directly from EPG
- Up to 8 programmable timers



4000 channels



Programme guide



Subtitles



Timers



Favourite lists

DVB-S2

HDMI

Dolby Audio

DiSEqC1.2

GotoX

SatCR supported

Digital HD Satellite Receiver **SRT 7009**

- Power saving: switches to standby after a definable time
- Fast and easy channel database up/download to/from USB device
- Teletext and full multi-lingual DVB subtitling supported⁴
- Multiple audio track support⁴
- 8 favourite lists for TV and radio channels
- Parental control for locking selected channels with a password
- Multi-lingual On Screen Display (OSD)
- Easy to use channel handling options for finding, editing, moving, favouring and locking of channels
- Power on with the last viewed channel


- **Video output via:** HDMI, SCART (RGB, CVBS)
- Digital audio output via S/PDIF coaxial for connection to a digital amplifier
- Automatic, network and manual channel scan options
- Supports MPEG-4 and H.264
- Supports DiSEqC 1.0, 1.1, 1.2, GOTO X, SatCR
- **Connections:** SAT IN, USB, Ethernet, HDMI, TV SCART, S/PDIF coaxial, Audio L/R, DC power
- **Accessories:** Remote control, 2x AAA batteries, power adapter

1 Subject to your local signal conditions

2 Dolby Digital Plus, Dolby and the double-D symbol are registered trademarks of Dolby Laboratories

3 STRONG cannot guarantee the playback of video files although extensions are listed, as it depends on codec used, data bit rate and resolution (all MPEG codec formats are supported).

4 Availability depending on broadcaster

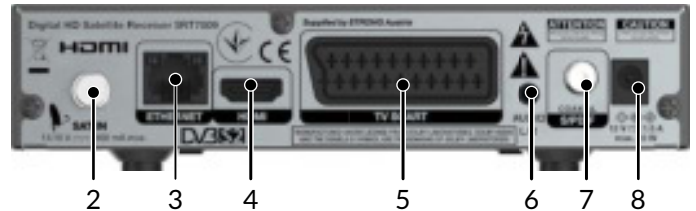

Pictures similar

- | | | |
|----------------------|--------------------------|----------------------------|
| 1. USB | 4. TV (HDMI) | 7. Digital audio amplifier |
| 2. Satellite antenna | 5. TV (SCART) | 8. Power adapter |
| 3. Ethernet | 6. Audio Hi-Fi amplifier | |

Demodulator

Demodulation: QPSK, 8PSK
 Input symbol rate: DVB-S QPSK: 1 ~ 45 Ms/s
 DVB-S2 8PSK/QPSK: 10~30 Ms/s
 FEC decoder: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 in DVB-S mode
 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 in DVB-S2 mode
 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 in 8PSK mode

Video Decoder

Input rate: Max. 20 Mbit/s
 Aspect ratio: 16:9 widescreen, Pillarbox, 4:3 Pan&Scan, Letterbox
 Video resolution: PAL 50Hz: 576i, 576p, 720p, 1080i, 1080p
 NTSC 60Hz: 480i, 480p, 720p, 1080i, 1080p

Audio Decoder

Audio decoding: MPEG-1 Layer 1 & 2, AC3, Dolby Digital Downmix
 Audio mode: Mono L/R, Stereo
 Audio Support: E-AC3, Dolby Digital, Dolby Digital Plus*
 Sampling rate: 32, 44.1, 48 kHz

Tuner

Type1 F Type, IEC169-24, Female
 Input frequency range: 950 - 2150 MHz
 RF impedance: 75 Ohm unbalanced
 Signal level: -65 to -25 dBm
 LNB power: 13/18 V DC (+/- 5%), max. 0.5 A, overload protected
 Switch versions: DiSEqC 1.0, 1.1
 LNB options: Universal, SatCR (max. 8 users)

Motor drive options: DiSEqC 1.2, GotoX (DiSEqC 1.3)

System & memory

Main processor: MSTAR MSD7S01
 Flash memory: 4 MB
 System memory: 64 MB

Connectors

SAT IN
 RJ45 - Ethernet
 USB 2.0 port: 5 V/800 mA (max.) supported
 HDMI
 TV SCART (RGB, CVBS, Audio L/R)
 3.5 mm Audio L/R
 S/PDIF (coax.)
 Power adapter (12 V, 1.5 A)

General Data

Power supply: AC 100 - 240 V ~ 50/60 Hz
 Input voltage: DC 12 V, 1.5 A
 Power consumption: max. 18 W, typ. 5 W
 Power consumption in standby: max. 1.0 W
 Operating temperature: 0 ~ +40 °C
 Storage temperature: -10 ~ +50 °C
 Operating humidity range: 10 ~ 85% RH, non-condensing
 Size (W x D x H) in mm: 187 x 146 x 45
 Weight in kg: 0.38

*Dolby Digital, Dolby Digital Plus and the double-D symbol are registered trademarks of Dolby Laboratories

EAN SRT 7009 : 9120072372230

SERVICE CENTER	
AT	support_at@strong.tv 0820 400 150 (6.012/Min. totterr. Festnetz)
DE	support_de@strong.tv 0180 501 49 91 (6.012/Min. totterr. Festnetz) (6.042/Min. max. Mobilfunknetze)
BG	support_bg@strong.tv +359 32 634451
DK	support_dk@strong.tv
CEE	support_hu@strong.tv +36 1 445 26 10
PL	support_pl@strong.tv 801 702 017
IT	support_it@strong.tv 199 404 032 Da rete fissa 24,8 cent. al min. 12,5 cent. scatto alla risposta. Da rete mobile max 49 cent. al min. 15,6 cent. scatto alla risposta.
NL	support_nl@strong.tv
FR	support_fr@strong.tv
UA	support_ua@strong.tv +380 (44) 238 61 50

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Manufactured under license from Dolby Laboratories. Dolby Audio, Dolby Digital, Dolby Digital Plus and the double-D symbol are trademarks of Dolby Laboratories. All product names are trademarks or registered trademarks of their respective owners.
 © STRONG 2020. All rights reserved.