



Digital HD Satellite Receiver

SRT 7030



Picture similar

High Definition TV at its finest

Enjoy your TV experience with this Digital High Definition Satellite Receiver SRT 7030. The easy handling, user-friendly menu and convenient functions make the receiver a reliable partner for you home entertainment. The integrated USB port allows you to record TV programmes and playback files directly from an external USB storage device. Further you can play digital Free-To-Air TV and radio via satellite. The receiver also scores with many other useful features, such as fast channel search, favourite lists for individual sorting of TV and radio programmes, booking events directly from the Electronic Programme Guide (EPG), teletext and more are standard for a STRONG receiver.

- HDTV receiver for digital Free-To-Air TV and radio programmes via satellite¹
- Supports Dolby® Digital Plus²
- USB port for playback of files³ and software updates
- Supports SatCR for connecting up to 8 receivers to 1 SatCR LNB
- Display showing channel number in operating mode and time in standby
- Recording TV programmes and Timeshift function
- 2000 channels/64 satellites memory capacity
- Exceptional picture quality and excellent sound
- Electronic Programme Guide (EPG) for on-screen information of present/next events for up to 7 days⁴
- Booking of events directly from EPG
- Up to 8 programmable timers
- Power saving: switches to standby after a definable time



4000 channels



Programme guide



Subtitles



Timers



Favourite lists



USB recording




Timeshift



Digital HD Satellite Receiver **SRT 7030**

- Fast and easy channel database up/download to/from USB device
- Teletext and full multi-lingual DVB subtitles supported⁴
- Multiple audio track support⁴
- 8 favourite lists for TV and radio channels
- Parental control for locking selected channels with a password
- Multi-lingual On Screen Display (OSD)
- Easy to use channel handling options for finding, editing, moving, favouring and locking of channels
- Power on with the last viewed channel
- **Video output via:** HDMI, SCART (CVBS)
- Digital audio output via S/PDIF coaxial for connection to a digital amplifier
- Automatic, network and manual channel scan options
- Supports MPEG-4 and H.264
- Supports DiSEqC 1.0, 1.1, 1.2, GOTO X, SatCR
- **Connections:** SAT IN, USB, HDMI, TV SCART, S/PDIF coaxial, Audio L/R, DC power
- **Accessories:** Remote control, 2x AAA batteries, power adapter

- 1 Subject to your local signal conditions
- 2 Dolby Digital Plus, Dolby and the double-D symbol are registered trademarks of Dolby Laboratories
- 3 STRONG cannot guarantee the playback of video files although extensions are listed, as it depends on codec used, data bit rate and resolution (all MPEG codec formats are supported).
- 4 Availability depending on broadcaster

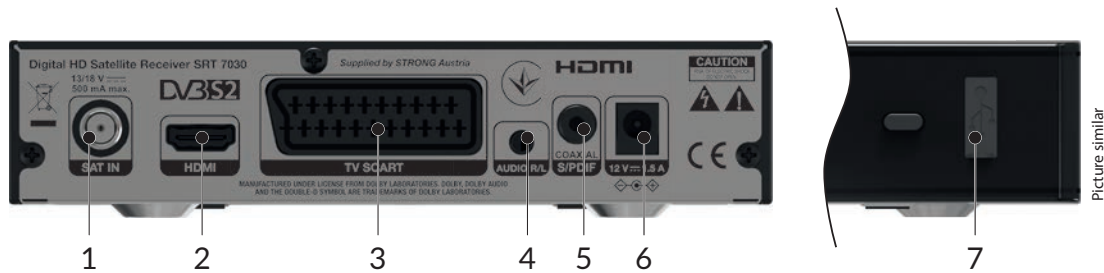

1. Satellite antenna
2. TV (HDMI)
3. TV (SCART)
4. Audio Hi-Fi amplifier (Audio R/L)
5. Digital audio amplifier (S/PDIF coaxial)
6. Power adapter
7. USB (front side)

Demodulator

Demodulation: QPSK, 8PSK
 Input symbol rate: DVB-S QPSK: 2 ~ 45 Ms/s DVB-S2 8PSK/QPSK: 2~45 Ms/s
 FEC decoder: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 in DVB-S mode
 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 in DVB-S2 mode
 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 in 8PSK mode

Video Decoder

Input rate: Max. 20 Mbit/s
 Aspect ratio: 16:9, 4:3 Pan&Scan, 4:3 Letterbox, Auto.
 Video resolution: 480i, 480p, 576i, 576p, 720, 1080i, 1080p, 50/60Hz

Audio Decoder

Audio decoding: MPEG-1/2 Layer 1 & 2
 Audio mode: Stereo, L/R, Stereo Audio
 Support: E-AC3, Dolby Digital, Dolby Digital Plus*
 Sampling rate: 32, 44.1, 48 kHz

Tuner

Type1 F Type, IEC169-24, Female
 Input frequency range: 950 - 2150 MHz
 RF impedance: 75 Ohm unbalanced
 Signal level: -65 to -25 dBm
 LNB power: 13/18 V DC (+/- 5%), max. 0.5 A, overload protected
 Switch versions: DiSEqC 1.0, 1.1 LNB options: Universal, SatCR (max. 8 users)
 Motor drive options: DiSEqC 1.2, GotoX (DiSEqC 1.3)

System & memory

Main processor: Ali M3510G
 Flash memory: 8 MB
 System memory: 64 MB

Connectors

SAT IN
 USB 2.0 port: Typ A/500 mA (max.)
 HDMI 1.3
 TV SCART (CVBS, Audio L/R)
 Audio L/R 3.5 mm
 S/PDIF (coax.)
 Power adapter (12 V, 1.5 A)

General Data

Power supply: AC 100 - 240 V ~ 50/60 Hz
 Input voltage: DC 12 V, 1.5 A
 Power consumption: max. 18 W, typ. 5 W
 Power consumption in standby: max. 0.65 W
 Operating temperature: 0 ~ +40°C
 Storage temperature: -10 ~ +70°C
 Operating humidity range: 10 ~ 95% RH, non-condensing
 Size (W x D x H) in mm: 168 x 105 x 40 incl. feet + connectors
 Weight in kg: 0,260

*Dolby Digital, Dolby Digital Plus and the double-D symbol are registered trademarks of Dolby Laboratories

SERVICE CENTER			
AT	support_at@strong.tv 0820 400 150 (6.012/Min. 060err. Festnetz)	IT	support_it@strong.tv 199 404 032 Da rete fissa 24,8 cent. al min. 12,5 cent. scatto alla risposta Da rete mobile max 49 cent. al min. 15,6 cent. scatto alla risposta
BG	support_bg@strong.tv +359 32 634451	NL	support_nl@strong.tv
CEE	support_hu@strong.tv +36 1 445 26 10	FR	support_fr@strong.tv
		UA	support_ua@strong.tv +380 (44) 238 61 50
		DE	support_de@strong.tv 0180 501 49 91 (6.012/Min. 060err. Festnetz) (6.042/Min. max. Mobilfunknetz)
		DK	support_dk@strong.tv
		PL	support_pl@strong.tv 801 702 017

EAN SRT 7030: 9120072373978
 Quantity /Carton: 5pcs

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio and the double-D symbol are trademarks of Dolby Laboratories. All product names are trademarks or registered trademarks of their respective owners.
 © STRONG 2022. All rights reserved.