

# STRONG

## Digital HD Satellite Receiver

### SRT 7010



### The best of HD in a stylish box!

SRT 7010 is an excellent HD satellite receiver for reception of FTA TV and radio programmes. Equipped with an Ethernet port, it enables access to RSS feeds and weather forecasts. The installation and handling is very easy! Furthermore, it includes many user-friendly features such as playback of files via the USB port, 8 favourite lists, an Electronic Programme Guide and convenient operating buttons on the front. The integrated USB port allows you to record TV programmes and playback files directly from an external USB storage device.

- HDTV receiver for digital Free-To-Air TV and radio programmes via satellite<sup>1</sup>
- RSS feeds and weather forecasts via Ethernet
- Supports Dolby® Digital Plus<sup>2</sup>
- USB port for playback of files<sup>3</sup>
- Supports SatCR for connecting up to 8 receivers to 1 SatCR LNB
- Display showing channel number in operating mode and time in standby
- Recording TV programmes and Timeshift function
- 4000 channels/64 satellites memory capacity
- Exceptional picture quality and excellent sound
- Electronic Programme Guide (EPG) for on-screen information of present/next events for up to 7 days<sup>4</sup>
- Booking of events directly from EPG
- Up to 8 programmable timers



4000 channels



EPG Programme guide



Subtitles



Timers



Favourite lists



USB recording

DVB-S2

HDMI

Dolby Audio

DiSEqC1.2


GotoX

SatCR supported

## Digital HD Satellite Receiver **SRT 7010**

- Power saving: switches to standby after a definable time
- Fast and easy channel database up/download to/from USB device
- Teletext and full multi-lingual DVB subtitling supported<sup>4</sup>
- Multiple audio track support<sup>4</sup>
- 8 favourite lists for TV and radio channels
- Parental control for locking selected channels with a password
- Multi-lingual On Screen Display (OSD)
- Easy to use channel handling options for finding, editing, moving, favouring and locking of channels
- Power on with the last viewed channel
- **Video output via:** HDMI, SCART (RGB, CVBS)
- Digital audio output via S/PDIF coaxial for connection to a digital amplifier
- Automatic, network and manual channel scan options
- Supports MPEG-4 and H.264
- Supports DiSEqC 1.0, 1.1, 1.2, GOTO X, SatCR
- **Connections:** SAT IN, USB, Ethernet, HDMI, TV SCART, S/PDIF coaxial, Audio L/R, DC power
- **Accessories:** Remote control, 2x AAA batteries, power adapter

1 Subject to your local signal conditions  
 2 Dolby Digital Plus, Dolby and the double-D symbol are registered trademarks of Dolby Laboratories  
 3 STRONG cannot guarantee the playback of video files although extensions are listed, as it depends on codec used, data bit rate and resolution (all MPEG codec formats are supported).  
 4 Availability depending on broadcaster

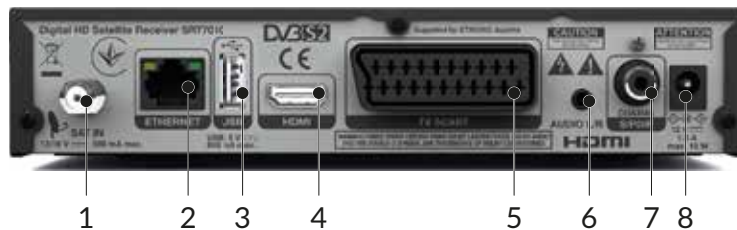

Picture similar

- 1. Satellite antenna
- 2. Ethernet
- 3. USB
- 4. TV (HDMI)
- 5. TV (SCART)
- 6. Audio Hi-Fi amplifier
- 7. Digital audio amplifier
- 8. Power adapter

### Demodulator

Demodulation: QPSK, 8PSK  
 Input symbol rate: DVB-S QPSK: 1 ~ 45 Ms/s  
 DVB-S2 8PSK/QPSK: 10~30 Ms/s  
 FEC decoder: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 in DVB-S mode  
 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 in DVB-S2 mode  
 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 in 8PSK mode

### Video Decoder

Input rate: Max. 20 Mbit/s  
 Aspect ratio: 16:9 widescreen, Pillarbox, 4:3 Pan&Scan, Letterbox  
 Video resolution: PAL 50 Hz: 576i, 576p, 720p, 1080i, 1080p  
 NTSC 60 Hz: 480i, 480p, 720p, 1080i, 1080p

### Audio Decoder

Audio decoding: MPEG-1 Layer 1 & 2, AC3, Dolby Digital Downmix  
 Audio mode: Mono L/R, Stereo  
 Audio Support: E-AC3, Dolby Digital, Dolby Digital Plus\*  
 Sampling rate: 32, 44.1, 48 kHz

### Tuner

Type1 F Type, IEC169-24, Female  
 Input frequency range: 950 ~ 2150 MHz  
 RF impedance: 75 Ohm unbalanced  
 Signal level: -65 to -25 dBm  
 LNB power: 13/18 V DC (+/- 5%), max. 0.5 A, overload protected  
 Switch versions: DiSEqC 1.0, 1.1  
 LNB options: Universal, SatCR (max. 8 users)

Motor drive options: DiSEqC 1.2, GotoX (DiSEqC 1.3)

### System & memory

Main processor: MSTAR MSD7501  
 Flash memory: 4 MB  
 System memory: 64 MB

### Connectors

SAT IN  
 RJ45 - Ethernet  
 USB 2.0 port: 5 V/800 mA (max.) supported  
 HDMI  
 TV SCART (RGB, CVBS, Audio L/R)  
 3.5 mm Audio L/R  
 S/PDIF (coax.)  
 Power adapter (12 V, 1.5 A)

### General Data

Power supply: AC 100 ~ 240 V ~ 50/60 Hz  
 Input voltage: DC 12 V, 1.5 A  
 Power consumption: max. 18 W, typ. 5 W  
 Power consumption in standby: max. 1.0 W  
 Operating temperature: 0 ~ +40 °C  
 Storage temperature: -10 ~ +50 °C  
 Operating humidity range: 10 ~ 85% RH, non-condensing  
 Size (W x D x H) in mm: 187 x 146 x 45  
 Weight in kg: 0.38

\*Dolby Digital, Dolby Digital Plus and the double-D symbol are registered trademarks of Dolby Laboratories

EAN SRT 7010: 9120072372247

SERVICE CENTER			
AT	support_at@strong.tv 0820 400 150 (€ 0,12/Min. Intern. Festnetz)	DE	support_de@strong.tv 0180 501 49 91 (€ 0,14/Min. deutsches Festnetz) (€ 0,42/Min. max. Mobilfunknetz)
BG	support_bg@strong.tv +359 32 634451	DK	support_dk@strong.tv
CEE	support_hu@strong.tv +36 1 445 26 10	PL	support_pl@strong.tv 801 702 017
		IT	support_it@strong.tv 199 404 032 Da rete fissa 24,8 cent. al min. 12,5 cent. scatto alla risposta. Da rete mobile max 49 cent. al min. 15,6 cent. scatto alla risposta.
		NL	support_nl@strong.tv
		FR	support_fr@strong.tv
		UA	support_ua@strong.tv +380 (44) 238 61 50

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Manufactured under license from Dolby Laboratories. Dolby Audio, Dolby Digital, Dolby Digital Plus and the double-D symbol are trademarks of Dolby Laboratories. All product names are trademarks or registered trademarks of their respective owners.  
 © STRONG 2020. All rights reserved.