


Digital HD Satellite Receiver SRT 7510

- Find channels in the channel list easily through filter function
- Parental lock function
- Teletext with selection of sub-pages via remote control⁴
- Multi-lingual subtitling and audio track support⁴
- Latest satellite and transponder data implemented
- Digital sound through coaxial output (S/PDIF)
- Recall list for up to 30 channels
- Auto DiSEqC function for a quick and easy installation of the most popular satellites⁵
- DiSEqC 1.0, 1.1, 1.2 and Goto-X supported
- Standby and channel switching via front buttons
- Power saving: automatic standby after a definable time and configurable deep sleep setting
- **Connectors:** SAT IN, IR, S/PDIF coaxial, HDMI, TV SCART, USB port (front), power supply
- **Accessories:** Remote control, 2x AAA batteries, power adapter (12 V/1,5 A)

1. Subject to your local reception conditions
2. Dolby Digital Plus, Dolby Digital and the double-D symbol are registered trademarks of Dolby Laboratories
3. STRONG cannot guarantee the playback of files although extensions are listed, as it depends on codec used, data bit rate and resolution (all MPEG codec formats are supported).
4. Availability depending on broadcast/Teletext via TV remote is only available via SCART
5. This function helps you finding satellites for your existing satellite system. The pre-configured satellites are: Astra 19.2E, Astra 23.5E, Astra 28.2E, HotBird 13.0E and Eutelsat 9.0E

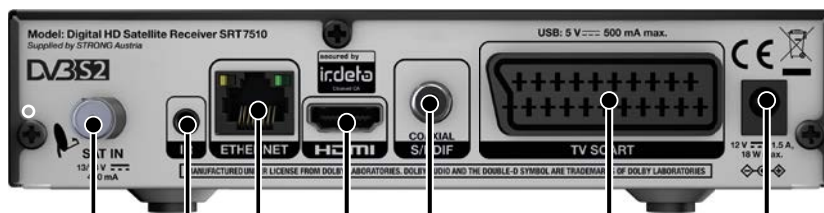

1. Satellite antenna
2. IR extender

3. Ethernet
4. TV (HDMI)

5. Digital audio amplifier
6. TV (SCART)

7. Power adapter

Demodulator

Demodulation: QPSK, 8PSK (Embedded in main-chipset)
Input symbol rate: 1 ~ 45 MBaud for DVB-S2
Inner code rate: 1/2, 2/3, 3/4, 5/6, 7/8
QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10

Video Decoder

Aspect ratio: 4:3 and 16:9. Pan & Scan, Letterbox, Full screen combined
Frame rate: PAL and NTSC
Video output: Scart: 576i, RGB, CVBS with CGMS-A
HDMI: 576i, 576p, 720p, 1080i, 1080p with HDCP

Audio Decoder

Audio decoding: MPEG Layer 1 &

2. Dolby Downmix

Audio mode: Mono L/R, Stereo
Audio support: Dolby Digital Plus*
Transcoding for HDMI and S/PDIF: Dolby Digital Plus to Dolby Digital

Tuner

Connector: Type1 F Type, IEC169-24, Female
Input frequency range: 950 - 2150 MHz
RF impedance: 75 Ohm unbalanced
Signal level: -65 dBm ~ -25 dBm
LNB power: 13/18 V DC (+/- 1 V), 400 mA, overload protected
DiSEqC version: 1.0, 1.1, 1.2, GOTO X and SatCR supported

Connectors

SAT IN
Ethernet
HDMI
TV SCART
Digital audio S/PDIF coaxial
IR
USB port 2.0, type A 5 V/500 mA (max.)
DC main power (12 V/1.5 A)

General Data

Power supply: 100 - 240 V AC, 50/60 Hz
Input voltage: 12 V DC, 1.5 A
Power consumption: max. 18 W
Power consumption in standby: max. 0.5 W
Operating temperature: 0° C to +40° C
Storage temperature: -10° C to +70° C
Operating humidity range: 10 %-95 % RH, non-condensing
Size (W x D x H) in mm: 168 x 105 x 40
Weight in kg: 0.29

*Dolby Digital Plus, Dolby Digital and the double-D symbol are registered trademarks of Dolby Laboratories

EAN SRT 7510: 9120072370595

HOTLINE

AT 0820 400 150
support_at@strong.tv

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. Dolby Audio, Dolby Digital, Dolby Digital Plus, Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. ASTRA is a registered trade mark of SES ASTRA, Irdeeto is a registered trade mark of Irdeeto Access B.V., the terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc in the United States and other countries. ASTRA is a registered trade mark of SES ASTRA, Eutelsat and HOT BIRD are registered trade marks of Eutelsat Communications. All other product names are trademarks or registered trademarks of their respective owners.
© STRONG 2019. All rights reserved.